



INTEGRATED THERMOSTATIC MIXING VALVE


Thermostatic mixing valve allowing easy adjustment of hot and cold water. Prevents scalding. Can be connected directly to the solenoid valve housing or to the flexible pipe. Includes built in filters and back check valves.

OPERATION

Enables the technical staff to manually set the water temperature at any given time. Prevents scalding by stopping the water flow if only hot water is supplied.

APPLICATION

With hot water temperatures set at a level to reduce the growth of Legionella, the risk of injury from scalding is increased. Our integrated thermostatic mixing valves allow you to limit the water temperature at the point of delivery. An easy-to-use adjustment lets you pre-mix hot and cold water as well as prevent the risk of scalding.

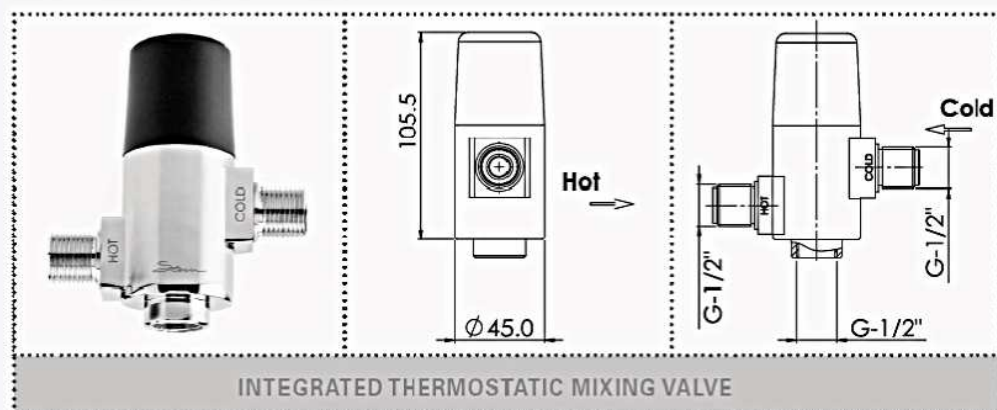

ORDERING INFORMATION	
PRODUCT NAME	PART NUMBER
KASSEL TMV	KSL01040

PRODUCT AT A GLANCE	
Installation	Below the sink, connected to the hot and cold water.
Water temperature:	Max 70°.
Operating pressure:	0.5-8.0 bar (15.0 - 116.0 PSI).

