MIRANDA N WALL MOUNTED DP TOUCH-FREE WALL MOUNTED FAUCET

SPECIFICATIONS

Touch-free wall-mounted electronic faucet. For cold or premixed water. For concealed installation in concrete or brick walls and installations with no back access. Powered by IP67 dual power input box that allows the faucet to be used with 9V battery or 9V transformer. Can be powered by a 9V transformer and an integrated back up system to be used with 9V lithium battery enabling the faucet to be used normally in case of power failure. Chrome plated body, other finishes available. Activated by concealed sensor built into the spout. Filter included. Sensor includes a low battery indicator. Adjustable settings by remote control: sensor range, security time, delay in, delay out, on-off and reset to factory settings.


OPERATION

The faucet is automatically activated when users place their hands in the sensor range and stops when the users remove their hands.

APPLICATION

Combining an elegant design with vandal-resistant features. Concealed installation in brick walls. Helps washrooms stay clean and saves water. Prevents cross contamination. Ideal for offices, hotels and restaurants. Paired with MIRANDA N WALL SOAP DISPENSER touch free soap dispenser, it creates a germ-free and automated environment.


PRODUCT AT A GLANCE		
Installation	Concealed installation in brick walls	
Power Supply Options	IP67 Dual power input box that allows the faucet to be used with a 9 V battery or a 9 V transformer.	
Operating pressure	0.5 - 8.0 BAR (7 - 116 PSI). With a pressure over 8 bar, use a pressure reducing valve.	
Water supply	Cold or premixed water	
Water Saving options	4 LPM / 1.0 GPM - PCA spray	
Water temperature	70°C Maximum	
Security Time	Auto shutoff after 90 seconds. adjustable by remote control	



OPTIONAL ACCESSORIES		
PRODUCT NAME	PART NUMBER	
REMOTE CONTROL	KSL01030	
Matching soap dispenser MIRANDA N WALL SOAP DISPENSER	KSL00913	

ORDERING INFORMATION		
PRODUCT NAME	PART NUMBER	POWER
MIRANDA N WALL MOUNTED DP	KSL00086	IP67 Dual power input box that allows the faucet to be used with a 9 V battery or a 9 V transformer. MIRANDA N WALL MOUNTED can also be powered by a 9 V transformer and an integrated backup system to be used with a 9 V lithium battery, which enables the product to be used normally in case of a power failure.



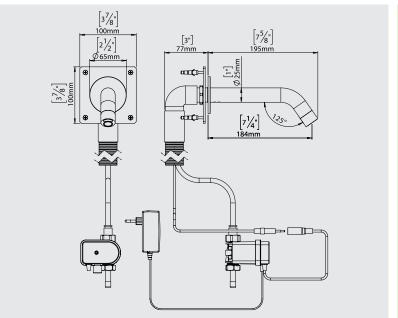

Kassel Sanitär S.L.

- Avda. de Castilla, 1 Polígono Industrial, 28830 San Fernando de Henares, Madrid, Spain
- Daimlerstraße 2, D-93133 Burglengenfeld, Germany

Tel. +34 916 778 993 | Fax. +34 916 777 774 | info@kassel.es | www.kassel.es